



### Sennheiser Documentation App



or online at  
[www.sennheiser.com/download](http://www.sennheiser.com/download)  
 evolution wired\_



# e 845/e 845 S

Quick Guide  
 Kurzanleitung  
 Guide rapide  
 Guida rapida  
 Guía de inicio rápido  
 Guia rápido  
 Beknopte handleiding  
 Krótka instrukcja obsługi  
 Snabbguide

Kvikstartguide  
 Pikaohje  
 Γρήγορος οδηγός  
 Kisa Kilavuz  
 Краткая инструкция  
 快速指南  
 快速使用指南  
 クイックガイド  
 퀵 가이드


Sennheiser electronic GmbH & Co. KG

Am Labor 1, 30900 Wedemark, Germany  
[www.sennheiser.com](http://www.sennheiser.com)

Printed in Germany  
 Publ. 07/18, 581330/A01


## SENNHEISER

### Setup



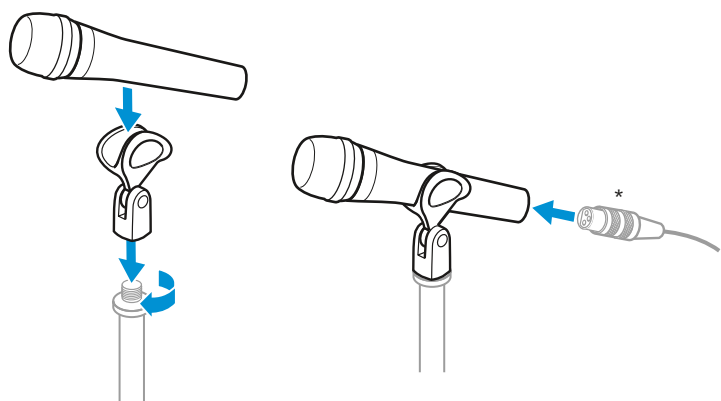


\*XLR-3 cable not included


### In the box

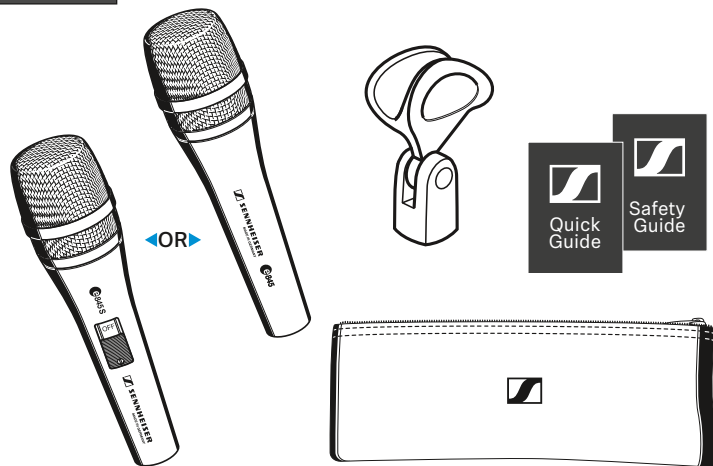


### Overview

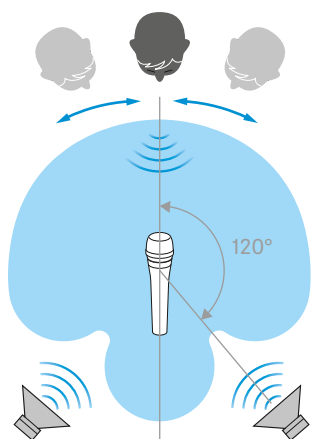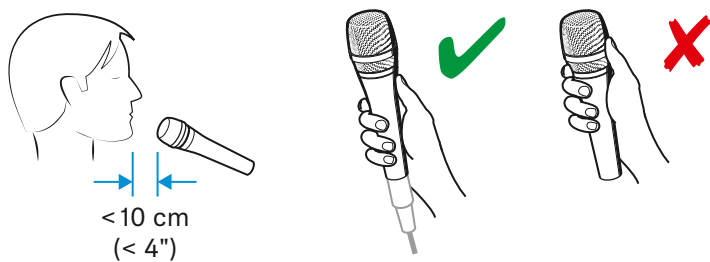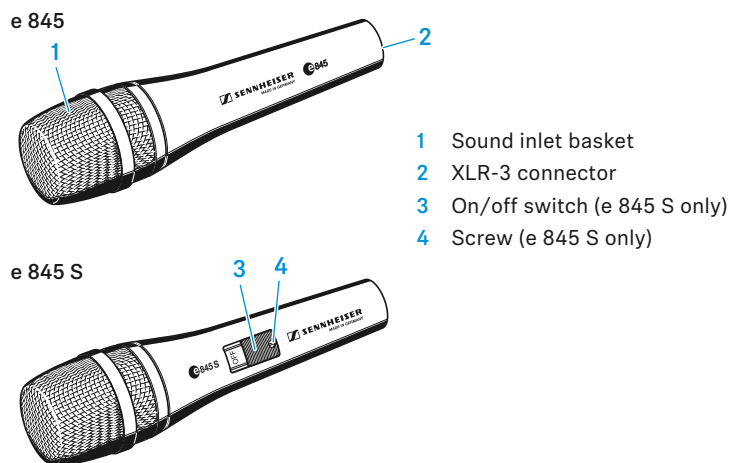

### ON/OFF






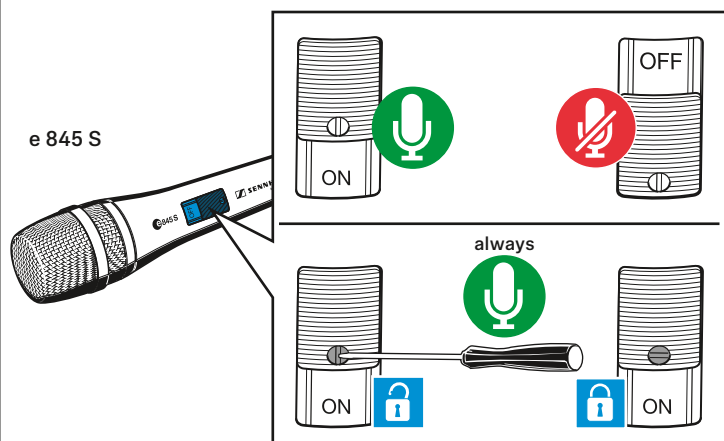


## Accessory

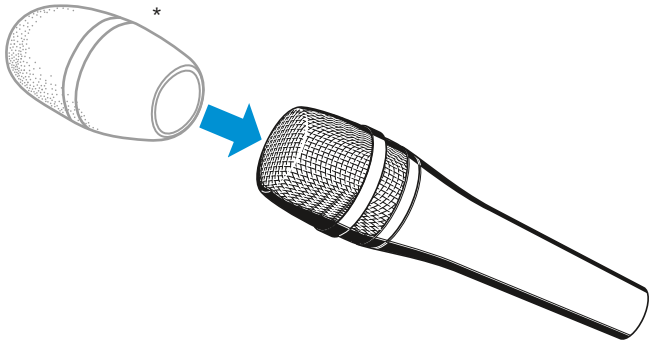

\*MZW 4032 not included


## Cleaning

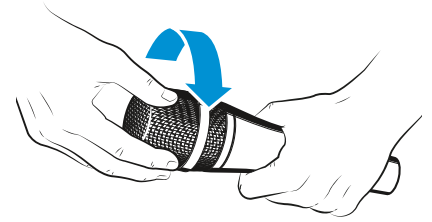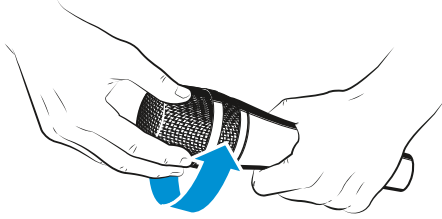

## Specifications

|                                    |                |
|------------------------------------|----------------|
| Transducer principle               | dynamic        |
| Frequency response                 | 40 - 16,000 Hz |
| Pick-up pattern                    | super-cardioid |
| Sensitivity (free field, at 1 kHz) | 1.8 mV/Pa      |
| Nominal impedance (at 1 kHz)       | 350 Ω          |
| Min. terminating impedance         | 1 kΩ           |
| Connector                          | XLR-3          |
| Temperature range                  | 0 °C to +40 °C |
| Dimensions                         | ∅ 46 x 185 mm  |
| Weight                             | 330 g          |

## Connector assignment

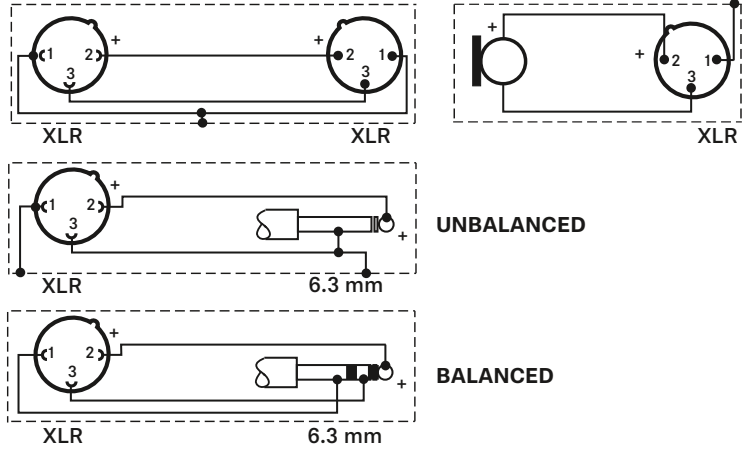

## Polar pattern and frequency response

